Safety instructions

Important! Before commencing installation work disconnect the main cable from the power supply - remove fuse or turn switch to "OFF"!

- Installation should be carried out in accordance with the local safety regulations.
- In order to prevent damage, please check walls for cables before drilling holes.
- 3. Please ensure that all electrical connections (even preassembled lamps) are screwed tightly or are fully inserted as good contact is essential for a long life-span at high currents. Please check for tight connections after changing or adjusting lamps. Screwed connections must be tightened after 20 minutes.
- 4. Please do not place objects on your system (e.g. for decorative purposes) if they were not delivered with the system.
- 5. The lamps get very hot when in use. Please allow lamps to cool down before touching.
- 6. Do not change lamps or spots when switched on.
- 7. System should not be enlarged with additional lamps.
- 8. Use of a dimmer is highly recommended. Dimmer must be compatible with type of light source.
- 9. To avoid greasy fingerprints it is recommended to wear white cotton gloves when handling visible metal and glass parts.
- 10. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- 11. We reserve the right to make technical alterations.

Please keep these instructions.

Light source: Replaceable LED-module (1990019)

2024-01-08 EU










Asteea Ceiling


Assembly Instructions

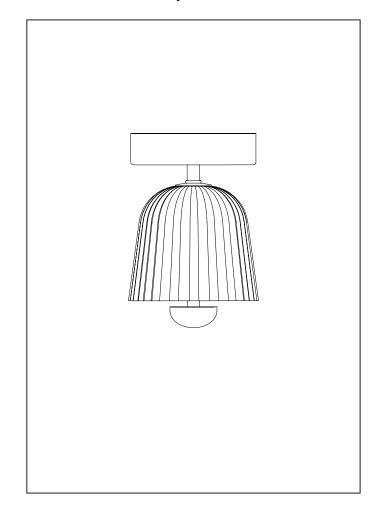

1








The driver must be replaced by a professional.

The LED-module is replaceable by the end-user. Instructions at www.nuura.com.

Mounting hole dimensions.






A: Attach the base of the lamp to the bracket by aligning the pins inside the base with the slots in the bracket and twisting the base counterclockwise.

B: Lock the base in place by tightening the setscrew with the included hexagonal key.






Mount the bracket to the wall or ceiling with screws.

Make sure to use appropriate rawlplugs/anchors for your construction. (Screws and rawlplugs are not included.)


Please make sure the base is fixated properly.




Lead the curved washer to the ceiling plate.

Carefully place the lampshade underneath the curved washer.

Place the reflector under the lampshade. Fix it by turning the reflector clockwise.



Use the cable terminal inside the enclosed terminal box to connect mains power to the input side of the driver.



Place the tube under the reflector and fix it by turning the tube clockwise.

1